


LIH(St)CH-TP

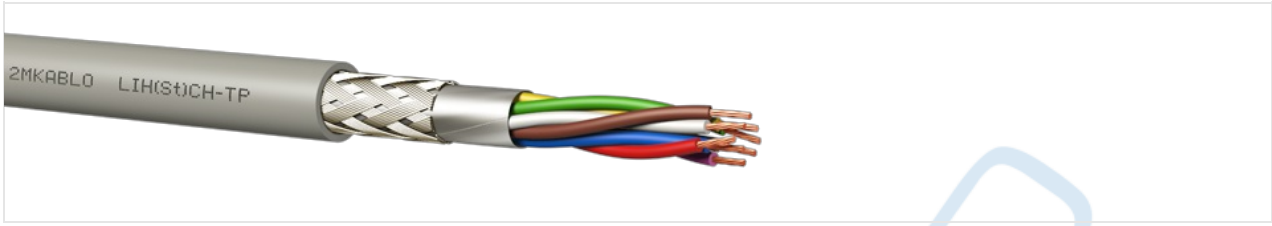

Areas of Use

These screened HFFR cables are used as signal transmission cables for indoor applications. These can be easily used with their flexible construction in narrow applications like electronic control systems of computer or audio systems or communication sector, electronic circuits, measurement devices, machine design, office equipment, etc. Screening protects the cable against the outer electrical effects. Because of the HFFR material, These don't burn easily and the flames go off by themselves. These have low smoke density and These don't emit poisonous and corrosive gases during the fire. These used in buildings where there are important goods or human population.

Cable Construction

Conductor	Stranded Annealed Copper (IEC/EN 60228, Class 5, 0.34 mm ² : Class 2)
Insulation	HFFR (EN 50290-2-26)
Lay-up	Cores are twisted as pairs and pairs are stranded in layers
1. Screen	Al-PET Foil
2. Screen	Tinned Copper Wire Braid
Outer Sheath	HFFR (EN 50290-2-27), RAL 7032 - Grey
Reference Standards	VDE 0812, TS 13755
Core Colors	DIN 47100 or Black-White and Numbered

Technical Properties

Operating Voltage	0.14 mm ² ..0.25 mm ² 250 V; 0.34 mm ² ..1.50 mm ² 300 V / 500 V; 2.50 mm ² 450 V / 750 V
Test Voltage	0.14 mm ² ..25 mm ² 1200 V; 0.34 mm ² ..10 mm ² 1500 V; 1.50 mm ² 2500 V
Loop Resistance	0.14 mm ² -≤276 Ω/km; 0.22 mm ² -≤170 Ω/km; 0.25 mm ² -≤155.6 Ω/km; 0.34 mm ² -≤112 Ω/km; 0.50 mm ² -≤78 Ω/km; 0.75 mm ² -≤52 Ω/km; 1.00 mm ² -≤39 Ω/km; 1.50 mm ² -≤26.6 Ω/km
Insulation Resistance	>200 M.Ωxkm
Capacitance (@800Hz)	Core - Core: 0.14 mm ² -≤80 nF/km; 0.22 mm ² ..0.34 mm ² -≤100 nF/km; 0.50 mm ² ..0.75 mm ² -≤110 nF/km; 1.00 mm ² ..1.50 mm ² -≤120nF/km; 2.50 mm ² - ≤140 nF/km Core-Screen: 0.14 mm ² -≤120 nF/km; 0.22 mm ² ..0.34 mm ² -≤150 nF/km; 0.50 mm ² ..0.75 mm ² -≤170 nF/km; 1.00 mm ² ..1.50 mm ² -≤180nF/km; 2.50 mm ² - ≤240 nF/km
Indutance (approx.)	0.65 mH/km
Temperature Range	Fixed: -30 °C+70 °C, Flexible: -5 °C+70 °C
Flame Retardancy	IEC/EN 60332-1
Smoke Density	IEC/EN 61034-2
Amount of Halogen Acid Gas	IEC/EN 60754-1
Corrosive Gases Measurement	IEC/EN 60754-2
Min. Bending Radius	Fixed: 8 x Cable Diameter, Flexible: 15 x Cable Diameter

Cross Section

Configuration / Cross-Section (mm/mm ²)	Cable Diameter (mm) (± 5%)	Copper Weight (kg / km)	~ Cable Weight (kg / km)
---	----------------------------	-------------------------	--------------------------

2x2x0.5	7.4	27	70
3x2x0.5	7.9	37	86
4x2x0.5	8.7	47	108
5x2x0.5	9.7	57	133
6x2x0.5	10.6	67	157
8x2x0.5	11.6	86	196
10x2x0.5	13.8	106	252
12x2x0.5	14.3	124	288
2x2x0.75	8.4	37	88
3x2x0.75	9.0	51	114
4x2x0.75	9.9	66	142
5x2x0.75	10.9	80	172
6x2x0.75	12.0	95	206
8x2x0.75	13.2	123	262
10x2x0.75	15.6	152	330
12x2x0.75	16.2	179	379
2x2x1	8.9	47	104
3x2x1	9.4	65	132
4x2x1	10.5	84	169
5x2x1	11.6	103	205
6x2x1	12.8	122	245
8x2x1	13.9	159	307
10x2x1	16.6	197	393
12x2x1	17.2	233	452
2x2x1.5	10.6	67	146
3x2x1.5	11.4	94	191
4x2x1.5	12.6	122	244
5x2x1.5	14.0	150	296
6x2x1.5	15.4	178	353
8x2x1.5	16.8	232	444
10x2x1.5	20.2	304	582
12x2x1.5	20.9	357	670

18.01.2025 20:51

Legal Warning: The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via info@2mkablo.com or call +90 (212) 222 8250.