


LIH(St)H-TP

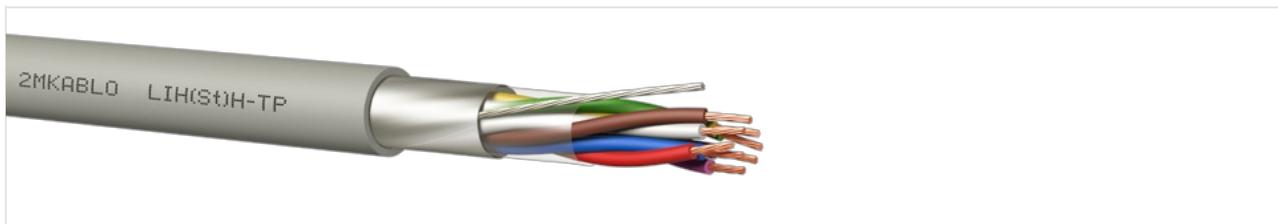

Areas of Use

These shielded and HFFR insulated cables are used as signal transmission cables in industrial applications. These can be easily used with their flexible construction in narrow applications like electronic control systems of computer or audio systems or the communication sector, electronic circuits, measurement devices, machine design, office equipment, etc. These used for indoor applications. Screening protects the cable from the outer electrical effects. Because of the HFFR material, These don't burn easily and the flames go off by themselves. These have low smoke density and These don't emit poisonous and corrosive gases during the fire. These used in buildings where there are important goods or human population.

Cable Construction

Conductor	Stranded Annealed Copper (IEC/EN 60228, Class 5, 0.34 mm ² : Class 2)
Insulation	HFFR (EN 50290-2-26)
Lay-up	Cores are twisted as pairs and pairs are stranded in layers
Separator	PET Foil
Drain Wire	Stranded Tinned Copper
Screen	Al-PET Foil
Outer Sheath	HFFR (EN 50290-2-27), RAL 7001 - Grey
Reference Standards	VDE 0812, TS 13755
Core Colors	DIN 47100 or Black-White and Numbered

Technical Properties

Operating Voltage	0.14 mm ² ..0.25 mm ² 250 V; 0.34 mm ² ..1.50 mm ² 300 V / 500 V
Test Voltage	0.14 mm ² ..25 mm ² 1200 V; 0.34 mm ² ..10 mm ² 1500 V; 1.50 mm ² 2500 V
Loop Resistance	0.14 mm ² -≤276 Ω/km; 0.22 mm ² -≤170 Ω/km; 0.25 mm ² -≤155.6 Ω/km; 0.34 mm ² -≤112 Ω/km; 0.50 mm ² -≤78 Ω/km; 0.75 mm ² -≤52 Ω/km; 1.00 mm ² -≤39 Ω/km; 1.50 mm ² -≤26.6 Ω/km
Insulation Resistance	>200 M.Ωxkm
Capacitance (@800Hz)	Core - Core: 0.14 mm ² -≤80 nF/km; 0.22 mm ² ..0.34 mm ² -≤100 nF/km; 0.50 mm ² ..0.75 mm ² -≤110 nF/km; 1.00 mm ² ..1.50 mm ² -≤120nF/km; 2.50 mm ² - ≤140 nF/km Core-Screen: 0.14 mm ² -≤120 nF/km; 0.22 mm ² ..0.34 mm ² -≤150 nF/km; 0.50 mm ² ..0.75 mm ² -≤170 nF/km; 1.00 mm ² ..1.50 mm ² -≤180nF/km; 2.50 mm ² - ≤240 nF/km
Indutance (approx.)	0.65 mH/km
Temperature Range	Fixed: -30 °C+70 °C, Flexible: -5 °C+70 °C
Flame Retardancy	IEC/EN 60332-1
Smoke Density	IEC/EN 61034-2
Amount of Halogen Acid Gas	IEC/EN 60754-1
Corrosive Gases Measurement	IEC/EN 60754-2
Min. Bending Radius	Fixed: 8 x Cable Diameter, Flexible: 15 x Cable Diameter

Cross Section

Configuration / Cross-Section	Cable Diameter (mm) (± 5%)	Copper Weight (kg / km)	~ Cable Weight (kg / km)
-------------------------------	----------------------------	-------------------------	--------------------------

(mm/mm ³)			
2x2x0.5	7.0	19	59
3x2x0.5	7.5	28	77
4x2x0.5	8.3	37	97
5x2x0.5	9.2	46	118
6x2x0.5	10.2	54	140
7x2x0.5	10.2	63	154
8x2x0.5	11.2	72	181
10x2x0.5	13.4	89	234
2x2x0.75	7.9	31	78
3x2x0.75	8.5	44	103
4x2x0.75	9.4	57	129
5x2x0.75	10.5	70	161
6x2x0.75	11.6	83	190
7x2x0.75	11.6	96	209
8x2x0.75	12.8	109	243
10x2x0.75	15.3	135	312
2x2x1	8.4	39	93
3x2x1	9.1	57	123
4x2x1	10.0	74	155
5x2x1	11.2	92	193
6x2x1	12.4	109	231
7x2x1	12.4	126	255
8x2x1	13.6	144	292
10x2x1	16.2	178	373
2x2x1.5	10.2	57	132
3x2x1.5	11.0	83	179
4x2x1.5	12.3	109	231
5x2x1.5	13.6	135	280
6x2x1.5	14.9	161	331
7x2x1.5	14.9	187	367
8x2x1.5	16.4	213	424
10x2x1.5	19.6	265	541

01.06.2026 22:47

Legal Warning: The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via info@2mkablo.com or call +90 (212) 222 8250.