


LIY(St)Y

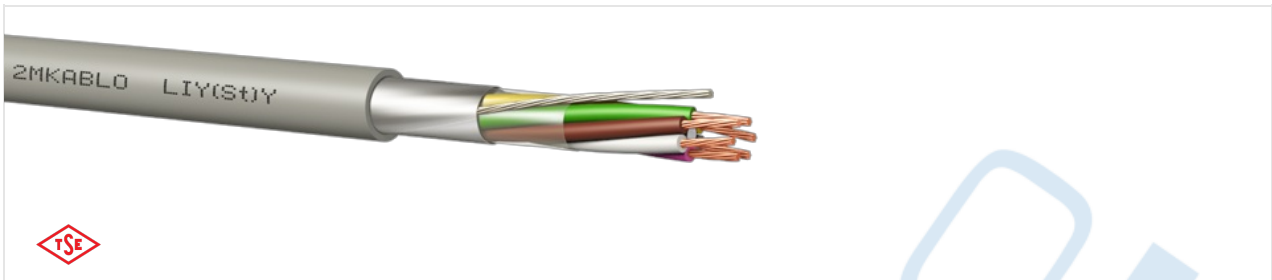

Areas of Use

These shielded and PVC insulated cables are used as signal transmission cables in industrial applications. These can be easily used with their flexible construction in narrow applications like electronic control systems of computer or audio systems or the communication sector, electronic circuits, measurement devices, machine design, office equipment, etc. These used for indoor applications. Screening protects the cable from the outer electrical effects.

Cable Construction

Conductor	Stranded Annealed Copper (IEC/EN 60228, Class 5, 0.34 mm ² : Class 2)
Insulation	PVC (EN 50290-2-21)
Core Colors	DIN 47100 (4 cores colors, white, yellow, brown, green)
Lay-up	Cores are stranded in layers
Separator	PET Foil
Drain Wire	Stranded Tinned Copper
Screen	Al-PET Foil
Outer Sheath	PVC (EN 50290-2-22), RAL 7001 - Grey
Reference Standards	VDE 0812, TS 13755

Technical Properties

Operating Voltage	0.14 mm ² ..0.25 mm ² 250 V; 0.34 mm ² ..1.50 mm ² 300 V / 500 V; 2.50 mm ² 450 V / 750 V
Test Voltage	0.14 mm ² - 800 V; 0.22 mm ² 1.00 mm ² - 1200 V; 1.50 mm ² 2.50 mm ² - 2500 V
Conductor Resistance	0.14 mm ² - ≤138 Ω/km; 0.22 mm ² - ≤85 Ω/km; 0.25 mm ² - ≤77.8 Ω/km; 0.34 mm ² - ≤56 Ω/km; 0.50 mm ² - ≤39 Ω/km; 0.75 mm ² - ≤26Ω/km; 1.00 mm ² - ≤19.5 Ω/km; 1.50 mm ² - ≤13.3 Ω/km; 2.50 mm ² - ≤7.98 Ω/km
Insulation Resistance	>200 M.Ωxkm
Capacitance (@800Hz)	Core - Core: 0.14 mm ² -≤80 nF/km; 0.22 mm ² ..0.34 mm ² -≤100 nF/km; 0.50 mm ² ..0.75 mm ² -≤110 nF/km; 1.00 mm ² .. 1.50 mm ² -≤120nF/km; 2.50 mm ² - ≤140 nF/km Core-Screen: 0.14 mm ² -≤120 nF/km; 0.22 mm ² ..0.34 mm ² -≤150 nF/km; 0.50 mm ² ..0.75 mm ² -≤170 nF/km; 1.00 mm ² .. 1.50 mm ² -≤180nF/km; 2.50 mm ² - ≤240 nF/km
Indutance (approx.)	0.65 mH/km
Temperature Range	Fixed: -30 °C+70 °C, Flexible: -5 °C+70 °C
Flame Retardancy	IEC/EN 60332-1
Min. Bending Radius	Fixed: 8 x Cable Diameter, Flexible: 15 x Cable Diameter

Cross Section

Configuration / Cross-Section (mm/mm ²)	Cable Diameter (mm) (± 5%)	Copper Weight (kg / km)	~ Cable Weight (kg / km)
2x0.5	4.6	11	32

3x0.5	4.8	15	38
4x0.5	5.3	19	49
5x0.5	5.8	24	61
7x0.5	6.4	33	75
9x0.5	7.7	41	103
10x0.5	8.4	46	112
2x0.75	5.1	18	42
3x0.75	5.4	24	53
4x0.75	6.0	31	66
5x0.75	6.7	37	85
7x0.75	7.3	50	103
9x0.75	8.7	63	138
10x0.75	9.6	70	152
2x1	5.5	22	49
3x1	5.7	31	61
4x1	6.3	39	77
5x1	7.0	48	100
7x1	7.8	66	124
9x1	9.2	83	166
10x1	10.1	92	180
2x1.5	6.6	31	70
3x1.5	6.9	44	88
4x1.5	7.7	57	111
5x1.5	8.5	70	144
7x1.5	9.4	96	180
9x1.5	11.2	122	244
10x1.5	12.4	135	268

23.11.2024 16:05

Legal Warning: The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via info@2mkablo.com or call +90 (212) 222 8250.