


## LOAD CELL Cables

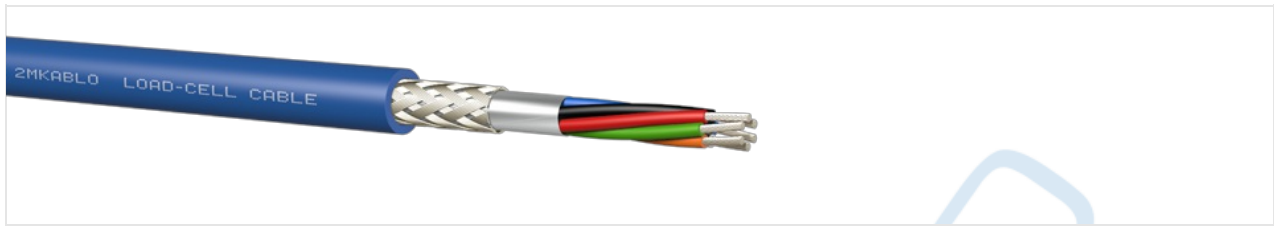

### Areas of Use

Used in electronic systems and electronic weighing devices in industrial applications. TPE outer sheathed versions are required to use where resistant to high mechanical stress, weather conditions, solvent, oil, and oil derivatives are needed.

### Cable Construction

Conductor	Stranded Tinned Copper (IEC/EN 60228, Class 6)
Insulation	PVC (EN 50290-2-21, T152)
Core Colors	White, Black, Red, Blue, Green, Grey
Lay-up	Cores are stranded in layers
1. Screen	Al-PET Foil
2. Screen	Tinned Copper Wire Braid
Outer Sheath	PVC (EN 50290-2-22, TM51), RAL 5015 - Blue

### Technical Properties

Operating Voltage	300 V
Test Voltage	1000 V
Capacitance (@800Hz)	Core - Core: $\leq 100$ nF/km, Core - Cores - Screen: $\leq 190$ nF/km
Temperature Range	Fixed: $-30$ °C ..... $+70$ °C, Flexible: $-5$ °C ..... $+70$ °C
Flame Retardancy	IEC/EN 60332-1
Min. Bending Radius (Fixed)	8 x Cable Diameter
Insulation Resistance	$>100$ M. $\Omega$ xkm

### Cross Section

Configuration / Cross-Section (mm/mm <sup>2</sup> )	Cable Diameter (mm) ( $\pm 5\%$ )	Copper Weight (kg / km)	~ Cable Weight (kg / km)
4x0.34	6.0	22	55
6x0.34	7.4	36	73

16.03.2025 5:47

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.