


## 2MKAB NGF FE180 PH30

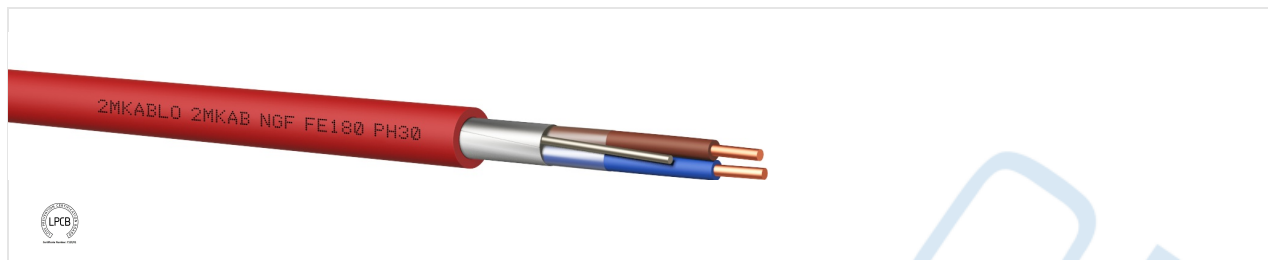

### Areas of Use

Fire-resistant cables are used for fire alarm systems, power supply or control of equipment that needs to function during a fire such as warning, emergency lighting, evacuation and monitor systems. The place of usage is intelligent or semi-intelligent buildings where dense human population or valuable goods are found. These can be hospitals, cinemas, theatres, schools, shopping centers, airports, factories, etc. Fire-resistant products have low smoke density, are halogen-free and they don't emit poisonous gases.

### Cable Construction

<b>Insulation</b>	Fire Resistant Silicon Rubber (BS 7655 E12)
<b>Conductor</b>	Annealed Solid Copper (IEC/EN 60228 Class 1)
<b>Lay-up</b>	Cores are stranded in layers
<b>Separator</b>	PET Foil
<b>Drain Wire</b>	0.80 mm Solid Tinned Copper
<b>Screen</b>	Al-PET Foil
<b>Outer Sheath</b>	Halogen Free Flame Retardant Compound (HFFR / LSZH / LSOH / FRNC, BS 7655-6 LTS3), RAL 3000 - Red or RAL 9003 - White
<b>Core Colors</b>	BS 7671 / HD308 S2

### Technical Properties

<b>Operating Voltage</b>	300 V / 500 V
<b>Test Voltage</b>	2000 V
<b>Insulation Resistance</b>	>200 M.Ωxkm
<b>Temperature Range</b>	Fixed: -30 °C.....+90 °C, Flexible: -5 °C .....+60 °C
<b>Flame Retardancy</b>	IEC/EN 60332-1, IEC/EN 60332-3-24
<b>Fire Resistance</b>	IEC 60331-21, BS 6387 C,W,Z, EN 50200 PH30
<b>Amount of Halogen Acid Gas</b>	IEC/EN 60754-1
<b>Corrosive Gases Measurement</b>	IEC/EN 60754-2
<b>Min. Bending Radius</b>	Fixed: 8 x Cable Diameter, Flexible: 15 x Cable Diameter
<b>Conductor Resistance</b>	1.50 mm <sup>2</sup> - ≤ 12 Ω/km; 2.50 mm <sup>2</sup> - ≤ 7.4 Ω/km
<b>Smoke Density</b>	IEC 61034-1/2

### Cross Section

Configuration / Cross-Section (mm/mm <sup>2</sup> )	Cable Diameter (mm) (± 5%)	Copper Weight (kg / km)	~ Cable Weight (kg / km)
2x1.50	6.7	31	67
3x1.50	7.1	43	85
4x1.50	7.9	56	109
2x2.50	7.9	49	96

3x2.50	8.5	70	128
4x2.50	9.2	93	160

**24.07.2024 13:27**

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.  
If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.