


## FireKab JE-H(St) HSWBH...Bd FE180 PH120

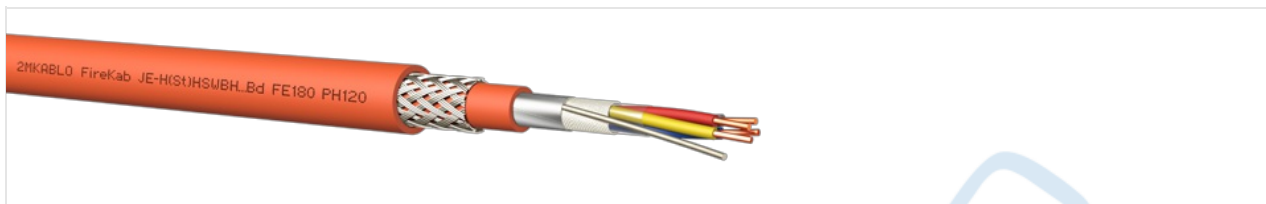

### Areas of Use

FireKab fire resistant cables are used for fire alarm systems, power supply or control of equipment that needs to function during a fire such as warning, emergency lighting, evacuation and monitor systems. The place of usage is intelligent or semi-intelligent buildings where dense human population or valuable goods are found. These can be hospitals, cinemas, theatres, schools, shopping centers, airports, factories, etc. FireKab products have low smoke density, are halogen-free and they don't emit poisonous gases.

### Cable Construction

Conductor	Annealed Solid Copper (IEC/EN 60228)
Core Colors	Blue/Red, Grey/Yellow, Green/Brown, White/Black - VDE 0815
Lay-up	4 pairs laid up to a bundle, bundles identified by spiral numbered or colored polyester tape, bundles laid up in layers. (Two pairs laid up as a star quad)
Separator	PET Foil
Drain Wire	0.80 mm Solid Tinned Copper
Screen	Al-PET Foil
Inner Sheath	HFFR, (EN 50290-2-27, VDE 0207 HM2)
Armour	Galvanized Steel Wire Braiding (70% Coverage)
Outer Sheath	HFFR (EN 50290-2-27), RAL 3000 - Red or RAL 2004 - Orange
Insulation	Fire Resistant Silicon Rubber (EN 50363-1, BS 7655 EI2)
Flame Barrier	Fiber Glass Tape

### Technical Properties

Operating Voltage	300 V
Test Voltage	Core - Core 500 V; Core - Screen 2000 V
Conductor Resistance	0.80mm - $\leq 36.6 \Omega/\text{km}$ ; 1.00 mm <sup>2</sup> - $\leq 18 \Omega/\text{km}$ ; 1.50 mm <sup>2</sup> - $\leq 12.1 \Omega/\text{km}$
Insulation Resistance	>500 M. $\Omega$ xkm
Capacitance Unbalance (800 Hz)	$\leq 200 \text{ pF}/100\text{m}$
Capacitance (@800Hz)	$\leq 120 \text{ nF}/\text{km}$
Temperature Range	Fixed: -30 °C.....+90 °C, Flexible: -5 °C .....+60 °C
Flame Retardancy	IEC/EN 60332-1, IEC/EN 60332-3-24
Fire Resistance	IEC 60331-21, EN 50200 PH120
Smoke Density	IEC/EN 61034-2
Amount of Halogen Acid Gas	IEC/EN 60754-1
Corrosive Gases Measurement	IEC/EN 60754-2
Min. Bending Radius	Fixed: 10 x Cable Diameter, Flexible: 15 x Cable Diameter

04.12.2024 22:07

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog

is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.