


## FireKab JE-H(St) HSWBH...Bd FE180 PH120

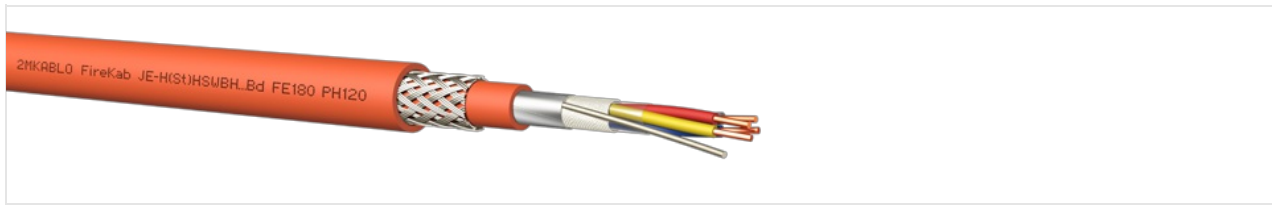

### Areas of Use

FireKab fire resistant cables are used for fire alarm systems, power supply or control of equipment that needs to function during a fire such as warning, emergency lighting, evacuation and monitor systems. The place of usage is intelligent or semi-intelligent buildings where dense human population or valuable goods are found. These can be hospitals, cinemas, theatres, schools, shopping centers, airports, factories, etc. FireKab products have low smoke density, are halogen-free and they don't emit poisonous gases.

### Cable Construction

<b>Conductor</b>	Annealed Solid Copper (IEC/EN 60228)
<b>Core Colors</b>	Blue/Red, Grey/Yellow, Green/Brown, White/Black - VDE 0815
<b>Lay-up</b>	4 pairs laid up to a bundle, bundles identified by spiral numbered or colored polyester tape, bundles laid up in layers. (Two pairs laid up as a star quad)
<b>Separator</b>	PET Foil
<b>Drain Wire</b>	0.80 mm Solid Tinned Copper
<b>Screen</b>	Al-PET Foil
<b>Inner Sheath</b>	HFFR, (EN 50290-2-27, VDE 0207 HM2)
<b>Armour</b>	Galvanized Steel Wire Braiding (70% Coverage)
<b>Outer Sheath</b>	HFFR (EN 50290-2-27), RAL 3000 - Red or RAL 2004 - Orange
<b>Insulation</b>	Fire Resistant Silicon Rubber (EN 50363-1, BS 7655 EI2)
<b>Flame Barrier</b>	Fiber Glass Tape

### Technical Properties

<b>Operating Voltage</b>	300 V
<b>Test Voltage</b>	Core - Core 500 V; Core - Screen 2000 V
<b>Conductor Resistance</b>	0.80mm - $\leq 36.6 \Omega/\text{km}$ ; 1.00 mm <sup>2</sup> - $\leq 18 \Omega/\text{km}$ ; 1.50 mm <sup>2</sup> - $\leq 12.1 \Omega/\text{km}$
<b>Insulation Resistance</b>	>500 M. $\Omega$ xkm
<b>Capacitance Unbalance (800 Hz)</b>	$\leq 200 \text{ pF}/100\text{m}$
<b>Capacitance (@800Hz)</b>	$\leq 120 \text{ nF}/\text{km}$
<b>Temperature Range</b>	Fixed: -30 °C.....+90 °C, Flexible: -5 °C .....+60 °C
<b>Flame Retardancy</b>	IEC/EN 60332-1, IEC/EN 60332-3-24
<b>Fire Resistance</b>	IEC 60331-21, EN 50200 PH120
<b>Smoke Density</b>	IEC/EN 61034-2
<b>Amount of Halogen Acid Gas</b>	IEC/EN 60754-1
<b>Corrosive Gases Measurement</b>	IEC/EN 60754-2
<b>Min. Bending Radius</b>	Fixed: 10 x Cable Diameter, Flexible: 15 x Cable Diameter

10.06.2026 5:41

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog

is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.