


## PT1 T2 ICAT

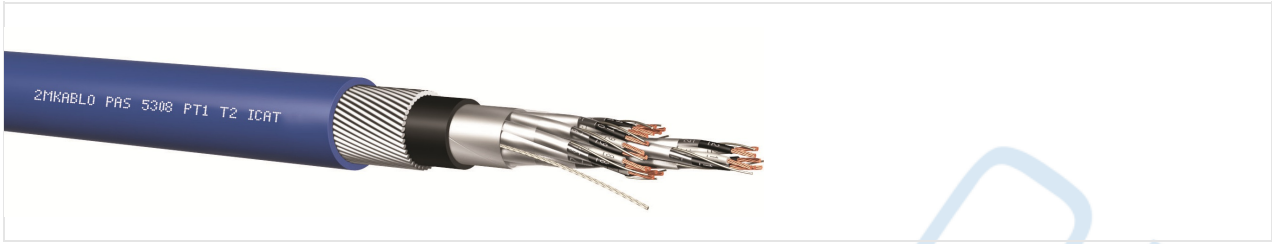

### Areas of Use

Instrumentation cables have a wide range of usage in process control and data processes, in analog and digital signal transmission. Factories, refineries, petrochemical plants, power plants, natural gas filling plants, etc. make up the general areas that these cables are used.

### Cable Construction

Conductor	Solid or Stranded Annealed Copper (IEC/EN 60228, Class 1, 2,5) -Table 1
Insulation	PE (EN 50290-2-23)
Core Colors	According to PAS 5308-1 Annex C-Table 2
Separator	PET Foil
Individual Screen	Al-PET Foil (with 7x0.30 mm Tinned Copper Drain Wire)
Lay-up	Shielded pairs / triples are stranded in layers
Separator	PET Foil
Overall Screen	Al-PET Foil (with 7x0.3 mm Tinned Copper Drain Wire)
Inner Sheath	PE
Armour	Round Galvanized Steel Wire (Min. Diameter 0.90 mm ±0.02 mm)
Outer Sheath	UV Resistant, Flame Retardant PVC (EN 50290-2-22 ), RAL 9005 - Black, RAL 5015 - Blue (other colors upon request)
Reference Standards	PAS 5308 Part 1 - Type 2

### Technical Properties

Operating Voltage	300 V / 500 V
Test Voltage	Core - Core: 2000 V; Core - Screen: 1000 V
Conductor Resistance	0.50 mm <sup>2</sup> - ≤36.8 Ω/km; 0.75 mm <sup>2</sup> - ≤24.5 Ω/km; 1.00 mm <sup>2</sup> - ≤18.4 Ω/km; 1.50 mm <sup>2</sup> - ≤12.3 Ω/km; 2.50 mm <sup>2</sup> - ≤7.6 Ω/km
Insulation Resistance	>5000 M.Ωxkm
Capacitance Unbalance (800 Hz)	≤500 pF/500m
Capacitance (@800Hz)	Table-3
L/R Ratio	0.50 mm <sup>2</sup> ..1.00 mm <sup>2</sup> - ≤25 μH/Ω; 1.30 mm <sup>2</sup> ..1.50 mm <sup>2</sup> - ≤40 μH/Ω; 2.50 mm <sup>2</sup> - ≤60 μH/Ω
Temperature Range	Fixed: -40 °C .....+70 °C, Flexible: -5 °C .....+50 °C
Flame Retardancy	IEC/EN 60332-1, IEC/EN 60332-3-24 (CAT C)
Oil Resistance	IEC/EN 60811-404, ASTM No 2 oil 70 °C 4 hours
Min. Bending Radius (Fixed)	12 x Cable Diameter

24.07.2024 13:24

**Legal Warning:** The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via [info@2mkablo.com](mailto:info@2mkablo.com) or call +90 (212) 222 8250.