


M2XACH FE180

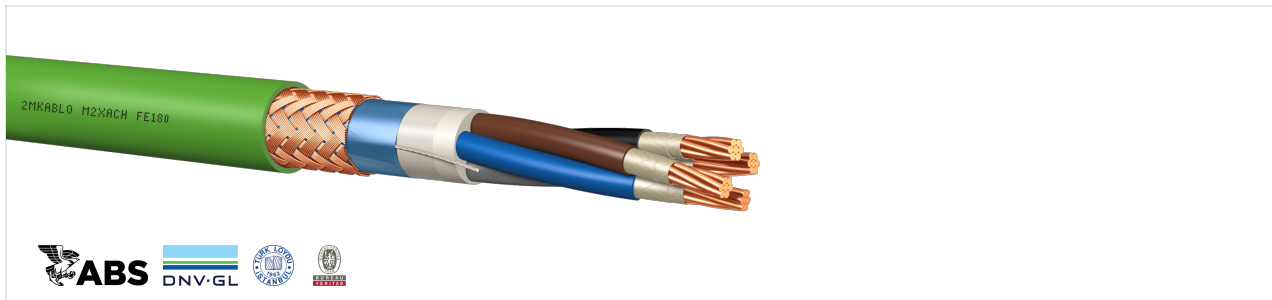

Areas of Use

Used as fixed installation cable in marine vehicles. Screening layer forms a shield for protection against electromagnetic interferences. Halogen-Free and Flame Retardant construction ensure non-corrosive and highly visible environment during a fire. Also, min. 180 minutes of circuit integrity under fire conditions is achieved by its special design.

Cable Construction

Conductor	Stranded Annealed Copper (IEC/EN 60228, Class 2) (tinned copper and/or Class 5 versions are available upon request)
Flame Barrier	Mica Tape
Insulation	XLPE (IEC 60092-360)
Core Colors	According to HD 308 S2 (# of Cores ≥ 5 => White numbered)
Lay-up	Cores are stranded in layers
Separator	PET Foil
1. Overall Screen	Al-PET Foil (with Tinned Copper Drain Wire)
Separator	PET Foil (HFFR filler upon request)
2. Overall Screen	Annealed Copper Wire Braid (90% Coverage)
Outer Sheath	HFFR (IEC 60092-360 SHF1), RAL 6018 - Green
Reference Standards	IEC 60092-376

Technical Properties

Operating Voltage	0.6/1 (1.2) kV
Test Voltage	3.5 kV (a.c.) 8.4 kV (d.c)
Conductor Resistance	IEC/EN 60228
Insulation Resistance	$>5000 \text{ M}\cdot\Omega\cdot\text{km}$
Temperature Range	$-40 \text{ }^\circ\text{C}\dots\dots\dots+90 \text{ }^\circ\text{C}$
Flame Retardancy	IEC/EN 60332-1-2, IEC/EN 60332-3-22 (CAT A)
Fire Resistance	IEC 60331-21
Smoke Density	IEC/EN 61034-1+2
Amount of Halogen Acid Gas	IEC/EN 60754-1
Corrosive Gases Measurement	IEC/EN 60754-2
Min. Bending Radius (Fixed)	8 x Cable Diameter

12.07.2026 2:51

Legal Warning: The information in this catalog is for marketing purposes. 2M Kablo can change this catalog during product development and any requirements. 2M Kablo can always change designs, technical specifications, images and other informations in this catalog without any notice. This catalog is only a guide and is valid at the time of download, not valid for an offer or contract.

If you need more information about the products in this catalog, please contact us via info@2mkablo.com or call +90 (212) 222 8250.